




RFID Access Card Reader



KR501

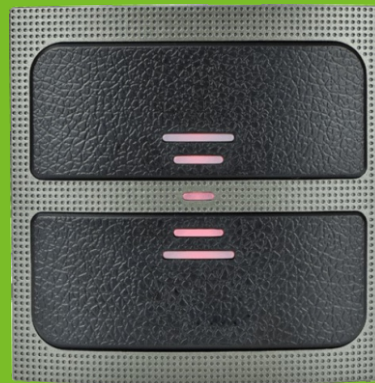

KR503

Product Advantages

- KR501E/KR503E: 125KHz Proximity card reader
- KR501M/KR503M: 13.56MHz Mifare card reader
- Read Range: Up to 10CM(125KHz)/5CM(13.56MHz)
- Easy to install on Metal Door Frame or Mullion
- External LED Control
- External Buzzer Control

Specifications

Card Type	EM or MF
Power / Current	DC 6-14V / Max.70mA
Read Range	Up to 10CM(EM) / 5CM(MF)
Output Format	26bit/34bit Wiegand (default)
Waterproof	IP65
Material	ABS+PC with texture
Dimension	86 x 86 x 16mm (KR501) 116 x 75 x 16mm (KR503)

Dimensions(mm)

